



# Electric storage water heaters

**Luna inox**  
stainless  
steel tank



**NEW!**



[www.kospel.pl](http://www.kospel.pl)

# The most modern enamelling plant



Kospel boasts the most modern fully automatic dry enamelling line for manufacturing the tanks. The automatized production has reduced human mistake factor to the minimum. The dry enamelling technology is an advanced method of applying enamel with optimal and even thickness over the entire inner surface of the tank.

Such a technology, contrary to wet enamelling, significantly improves the quality of the coating and, as a result, reliability of the tank enamelled.



This process is in conformity with strict ecology standards and apparently it is at the same time very efficient.



# Slim



20  
litres

30  
litres

40  
litres

50  
litres

60  
litres

80  
litres

# Slim pressure water heater

Slim storage water heater was designed for limited space. Thanks to reducing the width to 36 cm only, it occupies much less space than traditional storage water heaters.

Magnesium anodes give active anticorrosion protection what extends its lifespan.


Pickled steel covered with enamel ensures high durability of the heater. The enamel is spread by the dry enamelling technique which guarantees covering the tank precisely and evenly.

The thermal isolation, made of thick polyurethane, minimalizes the thermal loss.




## Application


20-30-40 litres




30-40 litres




50-60 litres



80 litres

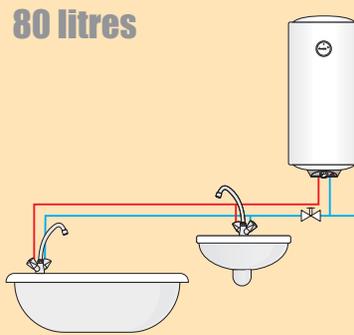

80 litres

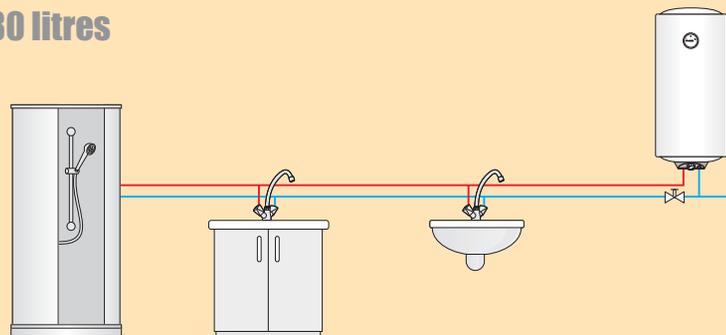

## Type

		OSV Slim					
Capacity	l	20	30	40	50	60	80
Rated power* / Voltage		1500W / 230V ~					
Temperature range	°C	7 - 77					
Heating time $\Delta T=40^{\circ}\text{C}$	h	0,63	0,94	1,25	1,6	2,0	2,6
24hrs electricity losses	kWh/24h	0,50	0,57	0,63	0,70	0,76	0,82
Height	mm	427	519	689	809	927	1167
Distance between water connections	mm	110					
Water connections		G 1/2"					

\*Also available with a 2kW heating element




# Luna


Luna storage water heater was designed to ensure quick and easy access to hot water. It is perfectly suitable for being assembled next to the sink in a sanitary room, a bathroom or a kitchen.

- very short heating time:
  - 5 litre - 5,5 min. at 25°C temperature rise
  - 10 litre - 8,5 min. at 25°C temperature rise
- resistant to corrosion, plastic (10l) or stainless steel (5l) tank
- option of an anti-freezing setting at 7°C
- temperature range between 23-70°C

## Pressure water heater POC Luna inox



POC.D-5 Luna **inox**  
(connect it to any tap mixer)



POC.G-5 Luna **inox**  
(connect it to a any tap mixer)



POC.Db-5 Luna **inox**  
with a tap mixer



POC.Gb-5 Luna **inox**  
with a tap mixer

**5**  
litres

**NEW !!!**




**stainless  
steel tank**

high density  
polyurethane thermal insulation

## Non-pressure POW Luna



POW.D-10 Luna  
with a tap



POW.G-10 Luna  
with a tap

**10**  
litres



Type		POC.D-5	POC.G-5	POW.D-10	POW.G-10
Capacity	l	5		10	
Rated power/voltage		2000W / 230V~		2000W / 230V~	
Rated pressure	MPa	0,6		0	
Temperature range	°C	23 - 70		23 - 70	
Dimensions	mm	427x285x163		438x305x189	
Weight	kg	~4,4		~6,2	
Water connections		Gz 1/2"		Gw 3/8"	Gz 1/2"



All technical data is based on standards of Central European countries. However, Kospel S.A. is fully flexible to adjust its appliances to other standards.

KOSPEL S.A.  
ul. Olchowa 1, 75-136 Koszalin  
Phone: +48 94 317 05 00, Fax: +48 94 317 05 37  
E-mail: [info@kospel.pl](mailto:info@kospel.pl) [www.kospel.pl](http://www.kospel.pl)

